

# Technical Product Datasheet




## Insulated Roof Panels

UFOAM-RPANEL – 30XX

Effective date: March 12, 2015

Supersedes:

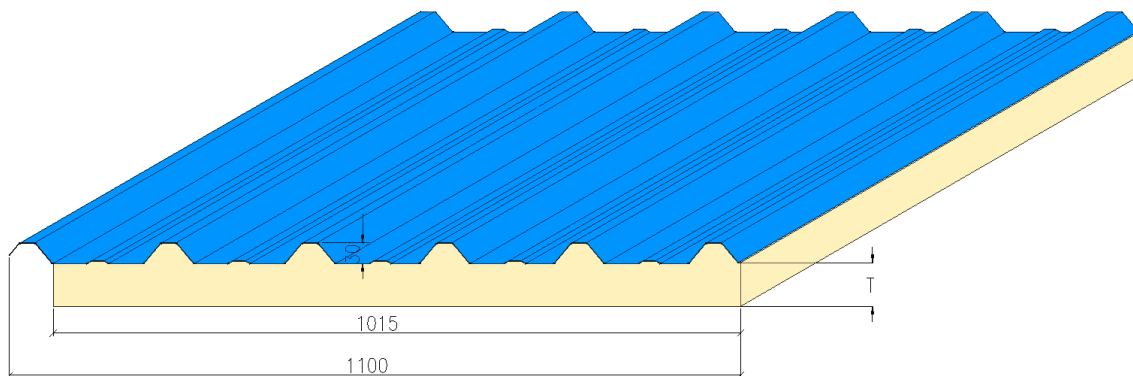

	Top Skin	Bottom Skin
Material	PPGI Standard / Galvalume	PPGI Standard / Galvalume
Colour	RAL 5012 & RAL3024	RAL 9002
Thickness TCT	0.47 / 0.50 / 0.60	0.47 / 0.50 / 0.60

Insulation "k" value:	0.022 W/m <sup>2</sup> /m/Hr. °K					
Maximum Panel Length (mm):	6000					
Thickness (mm):	30 / 40 / 50 / 60 / 80 mm					
Density of Foam (kg/m <sup>3</sup> ):	40 (±2) Minimum					
Fire Retardant:	Yes					
Panel Weight (Kg/RM)	Thickness	30	40	50	60	80
0.5 mm PPGI	Weight/RM	9.78	10.20	10.62	11.04	11.88
	R (K. m <sup>2</sup> /W)	1.4	1.9	2.3	2.8	3.6



Light Blue RAL 5012	Bright Red RAL 3024	Grey White RAL 9002
------------------------	------------------------	------------------------

Note: XX – Indicates the designated insulation thickness of the panel

U-Foam makes no warranty expressed or implied, except that such insulated sandwich panel products meet or exceeds the criteria outlined above at the time of shipment. U-Foam makes no warranty of salability or fitness of the goods for any particular purpose. The user shall determine the appropriateness of these materials for their intended applications and assumes total liability regarding loss or damage arising from the use of this product.

## U-FOAM PRIVATE LIMITED

Banjara Hills, Hyderabad – 500 018, INDIA  
Tel: +91-40-4024-5401, Fax: +91-40-4024-5400  
www.ufoam.com, info@ufoam.com