


Technical Product Datasheet



Insulated Wall Panels UFOAM-WPANEL-XX

Effective date: March 12, 2015

Supersedes:

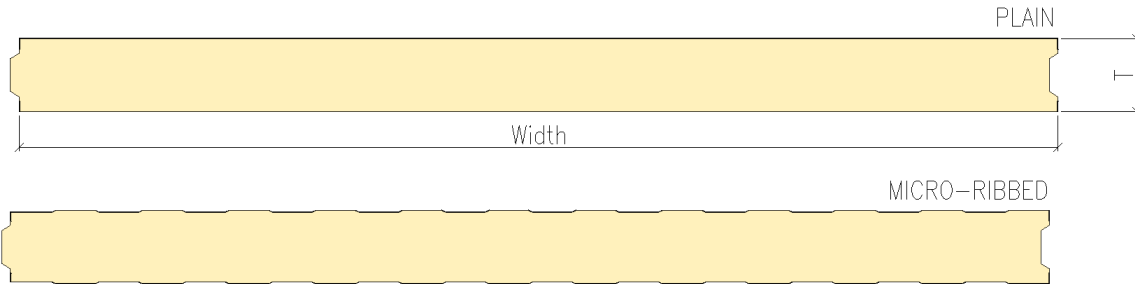

Wall panels are offered either plain or with micro-ribbing

	Top Skin	Bottom Skin
Material	PPGI Standard / Galvalume	PPGI Standard / Galvalume
Colour	RAL 9002	RAL 9002
Thickness TCT	0.47 / 0.50 / 0.60	0.47 / 0.50 / 0.60

Insulation "k" value:	0.022 W/m ² /m.Hr. °K
Maximum Panel Length (mm):	6000
Thickness (mm):	40 / 50 / 60 / 80 / 100 / 120 / 150
Density of Foam (kg/m ³):	40 (± 2) Minimum
Fire Retardant:	Yes

Panel Weight (Kg/RM) 0.5 mm PPGI / 1220 Panel Width	Thickness							
	40	50	60	80	100	120	150	
Weight/RM	10.96	11.38	11.80	12.64	13.48	14.32	15.58	
R (K. m ² /W)	1.9	2.3	2.8	3.6	4.6	5.3	6.7	



Grey White
RAL 9002

Additional colours, skin thicknesses, and panel thicknesses are available on request

Note: XX – Indicates the designated insulation thickness of the panel

U-Foam makes no warranty expressed or implied, except that such insulated sandwich panel products meet or exceeds the criteria outlined above at the time of shipment. U-Foam makes no warranty of salability or fitness of the goods for any particular purpose. The user shall determine the appropriateness of these materials for their intended applications and assumes total liability regarding loss or damage arising from the use of this product.

U-FOAM PRIVATE LIMITED

Banjara Hills, Hyderabad – 500 018, INDIA
Tel: +91-40-4024-5401, Fax: +91-40-4024-5400
www.ufoam.com, info@ufoam.com